


LOW POWER 50 OHM SMA POWER DIVIDERS

Model	Frequency Range	Configurations	Isolation	VSWR Maximum	Input Power
151-023-XXX*	DC - 2 GHz	2 and 4 way	N/A	1.40:1	1 Watt Average
151-170-XXX*	DC - 3 GHz	2, 3, 4 and 5 way	N/A	1.30:1	1 Watt Average
151-171-XXX*	DC - 4 GHz	2 and 3 way	N/A	1.30:1	1 Watt Average
151-173-002	DC - 6 GHz	2 way	N/A	1.50:1	1 Watt Average
151-058-XXX*	0.02 - 0.5 GHz	2, 3, 4, 6 and 8 way	18 dB minimum	1.50:1	1 Watt Average
151-118-XXX*	0.02 - 1.0 GHz	2, 3, 4, 6 and 8 way	18 dB minimum	1.40:1	1 Watt Average
151-166-002	0.2 - 2 GHz	2 way	20 dB minimum	1.50:1	5 Watts Average
151-086-XXX*	0.3 - 1.3 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
151-162-XXX*	0.4 - 0.45 GHz	2, 3, 6, 8 and 12 way	18 dB minimum	1.40:1	1 Watt Average
151-062-XXX*	0.4 - 2.3 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
151-037-XXX*	0.5 - 1.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
151-040-XXX*	0.5 - 2.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
151-045-XXX*	0.5 - 5.0 GHz	2 and 4 way	18 dB minimum	1.50:1	5 Watts Average
151-041-XXX*	0.8 - 1.0 GHz	2, 4 and 8 way	20 dB minimum	1.40:1	5 Watts Average
151-014-XXX*	0.8 - 2.2 GHz	2, 3, 4, 6 and 8 way	20 dB minimum	1.50:1	5 Watts Average
151-011-XXX*	0.8 - 3.5 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
151-038-XXX*	1.0 - 2.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
151-087-002	1 - 4 GHz	2 way	20 dB minimum	1.25:1	5 Watts Average
151-042-XXX*	1.7 - 2.2 GHz	2, 4 and 8 way	20 dB minimum	1.40:1	5 Watts Average
151-039-XXX*	2.0 - 4.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
151-078-XXX*	2.0 - 5.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
151-072-XXX*	3.4 - 4.2 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average

HIGH POWER 50 OHM SMA POWER DIVIDERS

Model	Frequency Range	Configurations	Isolation	VSWR Maximum	Input Power
151-017-002	0.8 - 2.5 GHz	2 way	20 dB minimum	1.40:1	20 Watts Average
151-096-XXX*	0.8 - 2.5 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	10 Watts Average
151-130-002	0.8 - 2.5 GHz	2 way	20 dB minimum	1.30:1	40 Watts Average
151-054-XXX*	0.8 - 3.5 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	10 Watts Average
151-177-XXX*	2.0 - 18 GHz	2, 4 and 8 way	15 dB minimum	2.00:1	20 Watts Average
151-010-XXX*	2.0 - 18 GHz	2, 4 and 8 way	14 dB minimum	2.10:1	30 Watts Average

*Inset desired configuration (example: 2 way = 002).
Complete specifications and outline drawings are available on our web site or consult the factory.

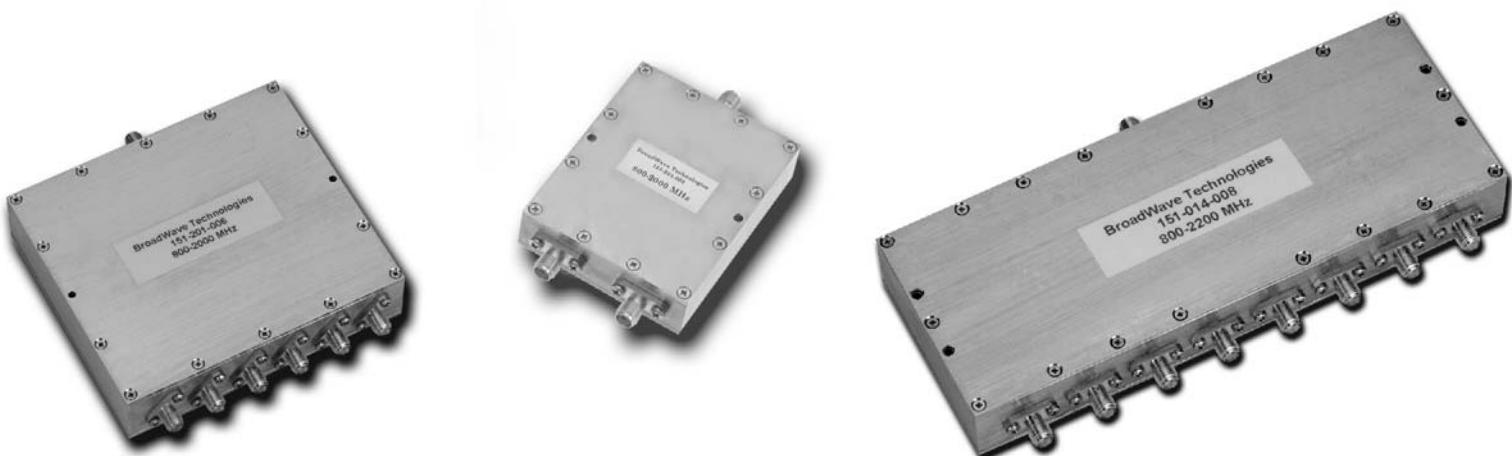

Visit our website for the most
up-to-date product listings!

www.broadwavetech.com

LOW POWER 50 OHM N POWER DIVIDERS

Model	Frequency Range	Configurations	Isolation	VSWR Maximum	Input Power
152-023-XXX*	DC - 2 GHz	2 and 4 way	N/A	1.40:1	1 Watt Average
152-170-XXX*	DC - 3 GHz	2, 3, 4 and 5 way	N/A	1.40:1	1 Watt Average
152-171-XXX*	DC - 4 GHz	2 and 3 way	N/A	1.50:1	1 Watt Average
152-058-XXX*	0.02 - 0.5 GHz	2, 3, 4, 6 and 8 way	18 dB minimum	1.40:1	1 Watt Average
152-118-XXX*	0.02 - 1.0 GHz	2, 3, 4, 6 and 8 way	18 dB minimum	1.40:1	1 Watt Average
152-166-XXX*	0.2 - 2 GHz	2 and 4 way	18 dB	1.50:1	5 Watts Average
152-086-XXX*	0.3 - 1.3 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-062-XXX*	0.4 - 2.3 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-037-XXX*	0.5 - 1.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-040-XXX*	0.5 - 2.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-045-XXX*	0.5 - 5.0 GHz	2 and 4 way	15 dB minimum	1.50:1	5 Watts Average
152-041-XXX*	0.8 - 1.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-014-XXX*	0.8 - 2.2 GHz	2, 3, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-043-XXX*	0.8 - 2.5 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-085-XXX*	0.8 - 2.7 GHz	2, 3 and 4 way	20 dB minimum	1.50:1	5 Watts Average
152-011-XXX*	0.8 - 3.5 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-038-XXX*	1.0 - 2.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-087-XXX*	1.0 - 4.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-042-XXX*	1.7 - 2.2 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-039-XXX*	2.0 - 4.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-072-XXX*	3.4 - 4.2 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
152-078-XXX*	2 - 5 GHz	2 and 4 way	20 dB minimum	1.50:1	5 Watts Average

HIGH POWER 50 OHM N POWER DIVIDERS

Model	Frequency Range	Configurations	Isolation	VSWR Maximum	Input Power
152-096-XXX*	0.8 - 2.5 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	10 Watts Average
152-130-002	0.8 - 2.5 GHz	2 way	20 dB minimum	1.50:1	40 Watts Average

LOW POWER 50 OHM TNC POWER DIVIDERS

Model	Frequency Range	Configurations	Isolation	VSWR Maximum	Input Power
153-023-XXX*	DC - 2 GHz	2 and 4 way	N/A	1.30:1	1 Watt Average
153-058-XXX*	0.02 - 0.5 GHz	2, 3, 4, 6 and 8 way	18 dB minimum	1.40:1	1 Watt Average
153-118-XXX*	0.02 - 1.0 GHz	2, 3, 4, 6 and 8 way	18 dB minimum	1.40:1	1 Watt Average
153-037-XXX*	0.5 - 1.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
153-040-XXX*	0.5 - 2.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
153-041-XXX*	0.8 - 1.0 GHz	2, 4 and 8 way	20 dB minimum	1.40:1	5 Watts Average
153-014-XXX*	0.8 - 2.2 GHz	2, 3, 4, 6 and 8 way	20 dB minimum	1.50:1	5 Watts Average
153-043-XXX*	0.8 - 2.5 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
153-038-XXX*	1.0 - 2.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
153-042-XXX*	1.7 - 2.2 GHz	2, 4 and 8 way	20 dB minimum	1.40:1	5 Watts Average
153-039-XXX*	2.0 - 4.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average

*Inset desired configuration (example: 2 way = 002).

Complete specifications and outline drawings are available on our web site or consult the factory.



2900 Graham Road, Suite B Franklin, IN 46131 USA

tel: 317.346.6101 fax: 317.346.6995

LOW POWER 50 OHM BNC POWER DIVIDERS


Model	Frequency Range	Configurations	Isolation	VSWR Maximum	Input Power
154-023-XXX*	DC - 2 GHz	2 and 4 way	N/A	1.40:1	1 Watt Average
154-170-XXX*	DC - 3 GHz	2, 3, 4 and 5 way	N/A	1.40:1	1 Watt Average
154-058-XXX*	0.02 - 0.5 GHz	2, 4, 8 and 16 way	18 dB minimum	1.50:1	1 Watt Average
154-118-XXX*	0.02 - 1.0 GHz	2, 4 and 8 way	20 dB minimum	1.40:1	1 Watt Average
154-037-XXX*	0.5 - 1.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
154-040-XXX*	0.5 - 2.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
154-041-XXX*	0.8 - 1.0 GHz	2, 4 and 8 way	20 dB minimum	1.40:1	5 Watts Average
154-014-XXX*	0.8 - 2.2 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
154-043-XXX*	0.8 - 2.5 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
154-038-XXX*	1.0 - 2.0 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	5 Watts Average
154-042-XXX*	1.7 - 2.2 GHz	2, 4 and 8 way	20 dB minimum	1.40:1	5 Watts Average

LOW POWER 75 OHM F POWER DIVIDERS

Model	Frequency Range	Configurations*	Isolation	VSWR Maximum	Input Power
179-110-XXX*	0.9 - 2.1 GHz	2, 4 and 8 way	18 dB minimum	1.50:1	2 Watts Average
179-179-XXX*	0.9 - 2.1 GHz	2, 4 and 8 way	20 dB minimum	1.50:1	10 Watts Average

*Insert desired configuration (example: 2 way = 002).

Complete specifications and outline drawings are available on our web site or consult the factory.

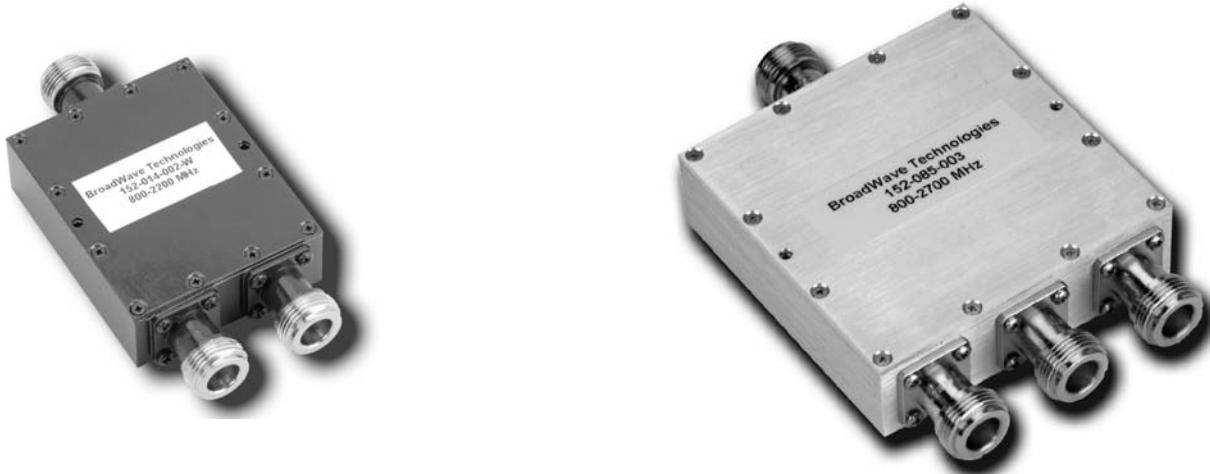

Visit our website for the most
up-to-date product listings!

www.broadwavetech.com

